



Solenoid valve

Reliable solenoid valve 3/4" and 1" long service life, it is able to work with zero pressure, normally is closed.

The working medium is water, oil or air, the body of valve is brass.


- working pressure air 0 - 10 Bar, water or oil 0 - 7 Bar
- maximum pressure 10 Bar (1 Mpa)
- the ambient temperature -5 až 80°C
- gaskets Viton
- voltage tolerance +- 10%
- connection 3/4" a 1"
- standard voltage 220 V
- power 26 VA/ 17 W
- temperature of the media -20 až 140°C gas do 98°C water solution



dimensions mm	A	100	B	55
valve 3/4"	C	117	D	73

dimensions mm	A	104	B	78
valve 1"	C	125	D	99

reliability and quality

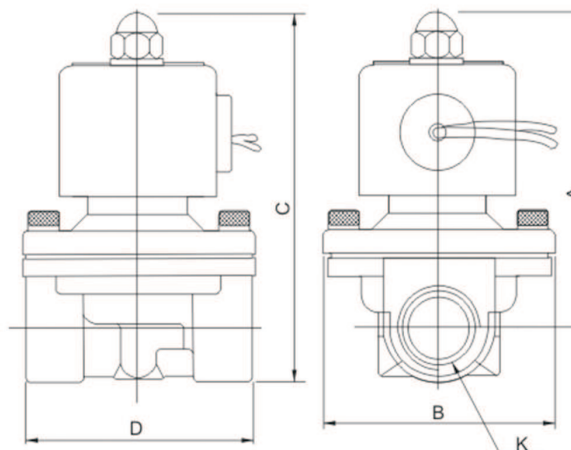

code 200075 solenoid valve 3/4"
200076 solenoid valve 1"

142.01 €

Displayed prices do not include VAT.

Final price also depends on actual Exchange rate between CZK/EUR

Important note: Are you registered with our company Hydro&Air? Registration allows you to obtain interesting discounts on a complete range of our goods. For more information visit our websites www.hydroair.cz